
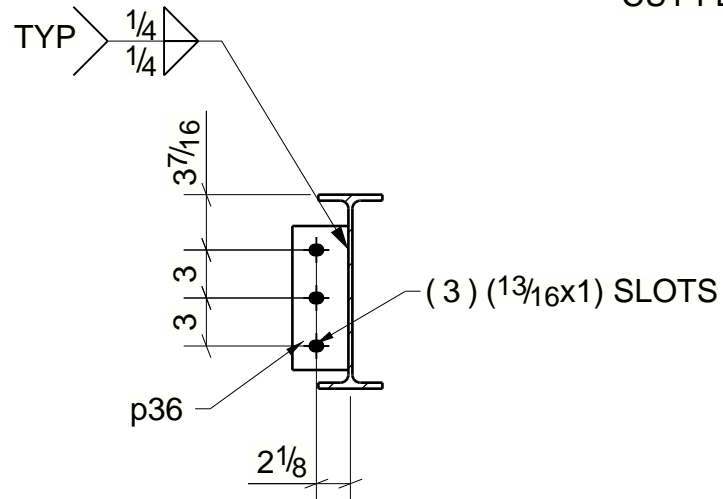


REF. NUMBER
ABM900

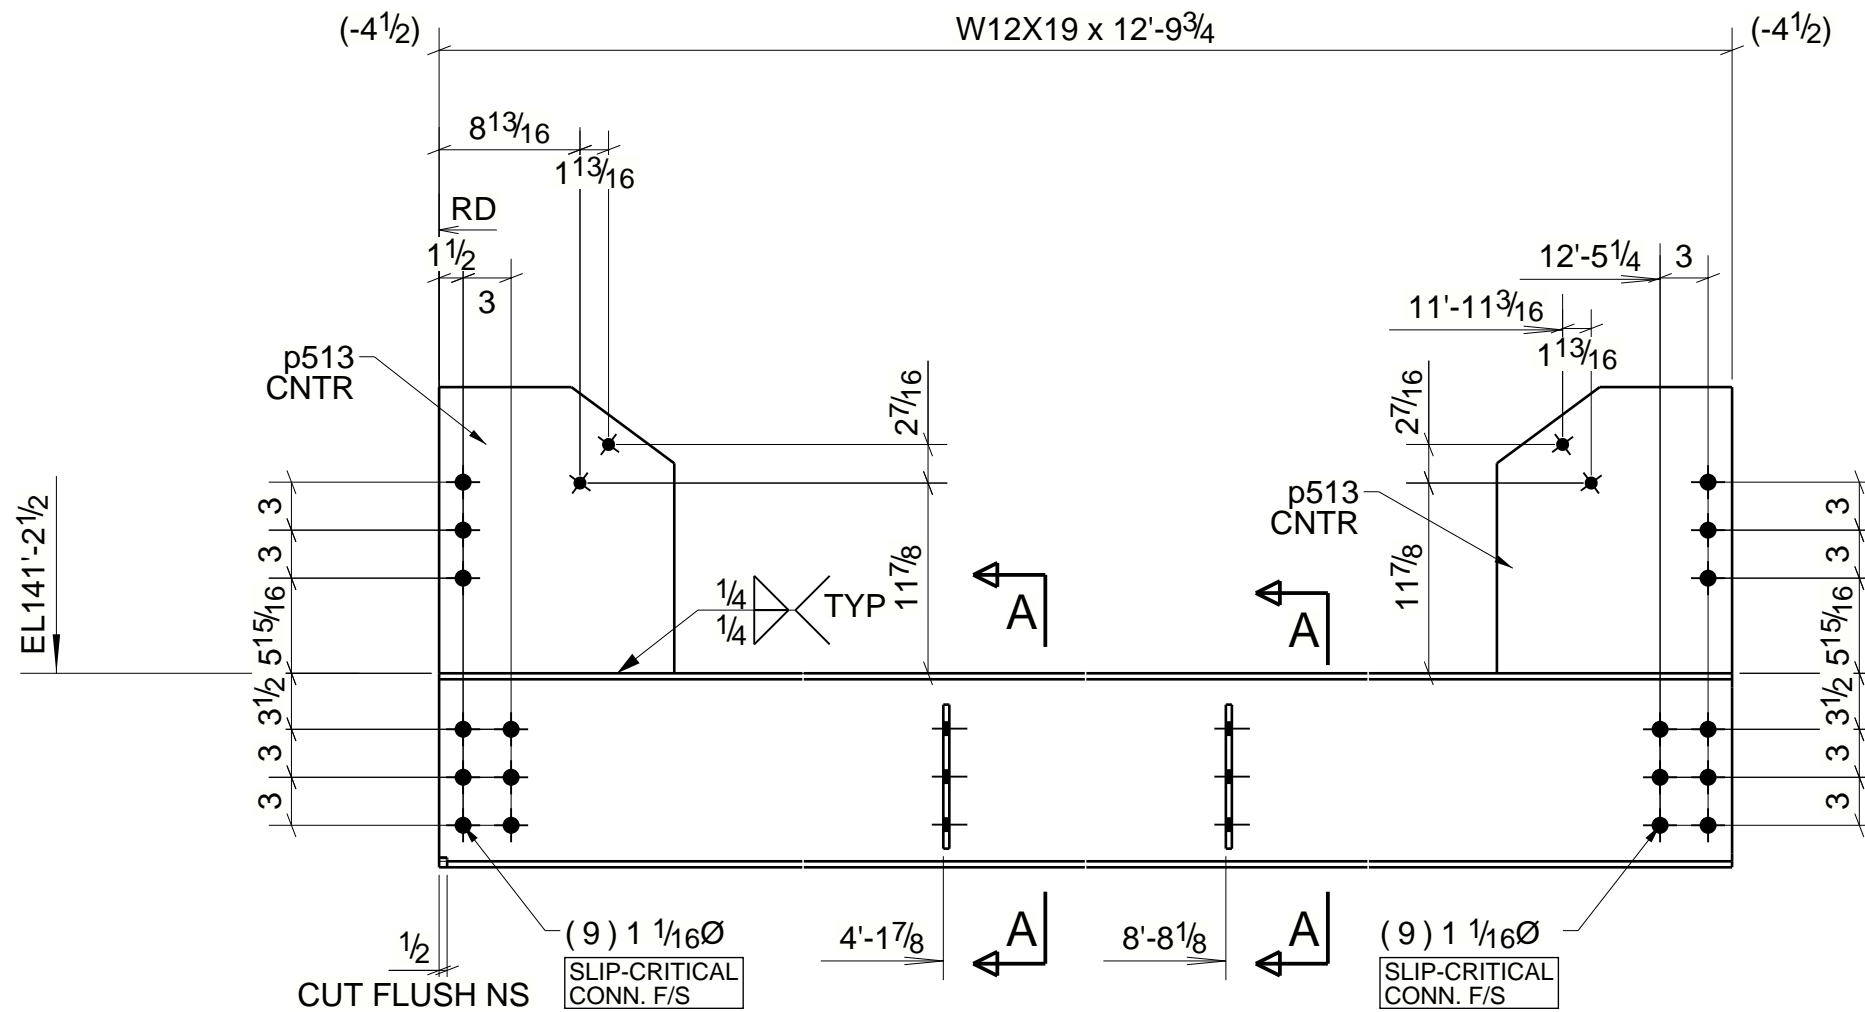

SECTION A - A

ONE - BEAM - 20B221

PREPARE SURFACES FOR
SLIP-CRITICAL CONN.
WHERE INDICATED.
DO NOT PAINT AREAS
OF SC CONNECTION.

BILL OF MATERIAL

SEQ	SHIPPING BILL		SHOP BILL						
	NO.	ERECTION MARK	NO.	SHAPE	MATERIAL GRADE	LENGTH	ASSY. MARK	REMARKS	WEIGHT
20	1	20B221		BEAM				SQ-2	
			1	W12X19	A992	12-9 3/4	20B221	Red 220R-345	243
			2	PL3/8"X3 1/2"	A36	0-9	p36		7
			2	PL1/2"X14 11/16"	A36	1-5 7/8	p513		70
			6	1Ø A325SC_TC BOLT		0-2 1/2		Site	
			12	1Ø A325SC_TC BOLT		0-2 1/4		Site	
TOTAL WEIGHT THIS DRAWING									320

ISSUED FOR APPROVAL		DESCRIPTION		REVISION AND ISSUE RECORD		
PROJECT		LOCATION		2020 N 42nd St, Waco, TX 76710		
CUSTOMER		ARCH/ENG		O'CONNELL ROBERTSON		
WACO HIGH SCHOOL		10/03/2022		A		
REV #		DATE				
FIELD CONN (U.N.)		HOLES (U.N.)				
3/4 A325N_TC		13/16"				
SURFACE PREP		SHOP PAINT				
SSPC-SP2		Red 220R-345				
DATE		DET		CHK		
10/03/2022		MJC		AJM		
JOB NO.		DRAWING NO.				
32-22017		20B221				

